

Intelligent Flammable Gas Detector

GTD-3000Ex

Feature

- ▷ Continuous detection of flammable gases in explosion hazardous area with flame proof structure
- ▷ Self diagnosis function with built-in Microprocessor
- ▷ Detection gas from low to high concentration owing to various detection principle
- ▷ Stable quality and proved detection principle for service life
- ▷ Built-in back light LCD or OLED display
- ▷ Auto calibration and program setting with a magnet bar
- ▷ 2-stage alarm, 1-trouble display and relay contact output
- ▷ 4-20mA DC output signal
- ▷ Easy configuration of monitoring by RS-485 Modbus isolated serial data communication (Option)
- ▷ With the alarm unit
 - Normal : Green LED
 - Alarm : Red LED, Buzzer (95 dB)
 - Trouble : Yellow LED
- ▷ Calibration and maintenance by one-man

Special Application



Remote type




Alarm Beacon Type
(Alarm device)




Insert type



General

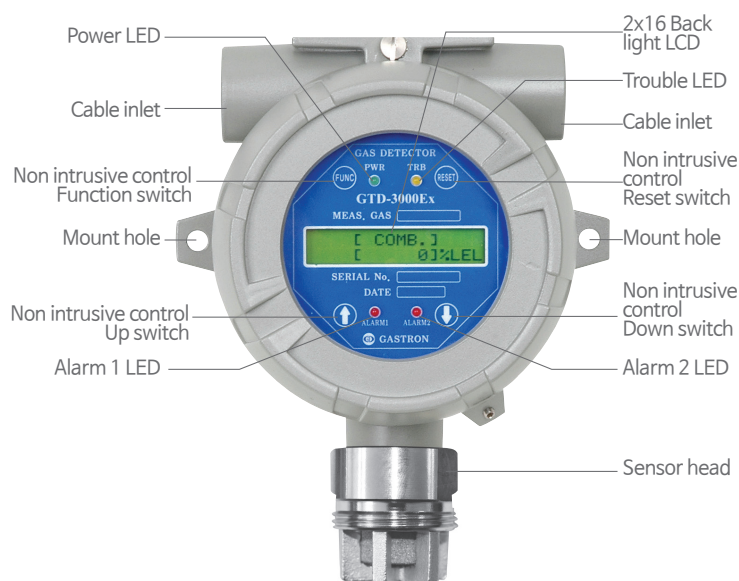

Dimension (Unit:mm)

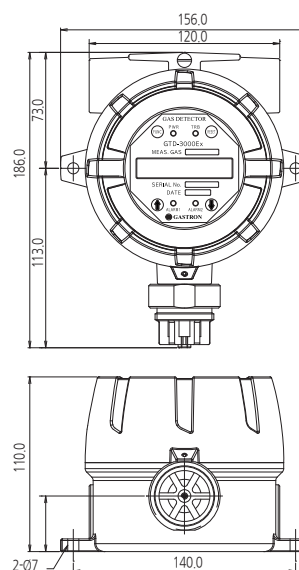

Accessories



Specification

※Specifications are subject to be changed without prior notice.

INTELLIGENT & LOCAL DISPLAY TYPE FLAMMABLE GAS DETECTOR			
Model	GTD-3000Ex		
Measuring gas	Flammable gases (LNG, LPG, H ₂ , Methane, Buthane & etc)		
Measuring type	Diffusion type		
Measuring method	Catalytic cell	Hot wire semiconductor cell	Thermal conductivity cell
Measuring range	0~100% LEL	0~2000ppm	0~100% Vol
Response time	< 15sec / 90% scale		
Accuracy	±3% / Full scale		
Parameter control	Non intrusive control with a Magnet (calibration, maintenance, alarm setting)		
Operation mode display	4-LED (Power, 2-stage alarm, 1-trouble)		
Measuring value display	LCD display (Built in back light 2-Line, 16 characters) / OLED Type (Option)		
Alarm signal output	250V 1A / 3-SPST relay contact (2-stage alarm, 1-trouble)		
Output signal	Analog : Measuring signal : 4-20mA DC		
	Maintenance signal : 3mA DC		
	Calibration signal : 3mA DC		
	Fault signal : 0mA DC		
	Digital : RS-485 Modbus(Optional)		
Cable/Distance	Power + Signal cable : 3-wire >1.5sq (AWG16) / 2500m max.		
	RS-485 data communication cable : 1 pair (UL2919 RS-485) / 1000m max		
Conduit connection	M20 x 1.5P, M25x1.5P, NPT ½", NPT ¾"		
Mounting type	2" Pole mount, Wall mount, Duct mount		
Operating temperature	-20℃ ~ +60℃		
Operating humidity	5 ~ 99% RH (non-condensing)		
Operating power	18 ~ 31V DC (24V DC normal) / 250mA		
Dimensions	156 x 186 x 110 (W x H x D)mm		
Weight	1.8kg		
Approval	Explosion proof type (Ex d IIC T6, IP65) KCs		
	Explosion proof type (Ex d IIC T5 Gb) NEPSI		
	CE (EN 50270:2006), KC		