

싱글채널 휴대용 가스감지기

G-Finder Single




정확합니다

- 작동과 함께 실시간 가스 감지 및 표시
- 정기적 Bump Test 주기 알림 기능
- 정기적 교정 주기 알림 기능
- O2/CO/H2S 중 1가지 가스 감지

편리합니다

- 배터리, 센서 교체 없이 보증기간 2년
- 버튼 하나로 작동 가능

DIMENSION (Unit : mm)

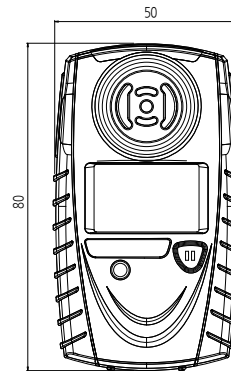

ACCESSORY



Sampling pump

SPECIFICATION

※ Specifications are subject to be changed without prior notice

G-FINDER SINGLE				
Case Material	Polycarbonate + Thermoplastic Polyurethane			
Dimension	50(W) x 80(H) x 41(D)mm (alligator clip included)			
Weight	103 g (alligator clip included)			
Operating Temperature	-20°C ~ +50°C			
Operating Humidity	5 ~ 95% r.h.			
Alarm	Visual, Vibrating, Audible			
Ingress Protection	IP 67			
Sensors	O2 / CO / H2S - Electrochemical sensor			
Display	Liquid Crystal Display (LCD)			
Battery	3.6V Primary lithium-thionyl chloride			
Measuring Ranges	Gas	Symbol	Range	Resolution
	Oxygen	O2	0 ~ 25% vol	0.1% vol
	Carbon Monoxide	CO	0 ~ 300 ppm	1 ppm
	Hydrogen Sulfide	H2S	0 ~ 100 ppm	0.1 ppm
Factory Alarm Setpoints	Gas	Symbol	Low Alarm	High Alarm
	Oxygen	O2	19.5% vol	23.5% vol
	Carbon Monoxide	CO	35 ppm	200 ppm
	Hydrogen Sulfide	H2S	10 ppm	15 ppm

CERTIFICATION

KCs	Ex ia IIC T4 Ga	ATEX / IECEx	Ex ia IIC T4 Ga
NEPSI	Ex ia IIC T4 Ga	RoHS2 / CE / KC	Refer to website